Schindler 9300 Advanced Edition

Type 10 • 35°-K

Rise: max. 6 m at a step width of 1000 mm
Balustrade: design E
Balustrade height: 900/1000 mm

Inclination: 35°
Step width: 600/800/1000 mm
Step run: 2 horizontal steps

All dimensions in mm.
Observe national regulations!
Subject to changes.

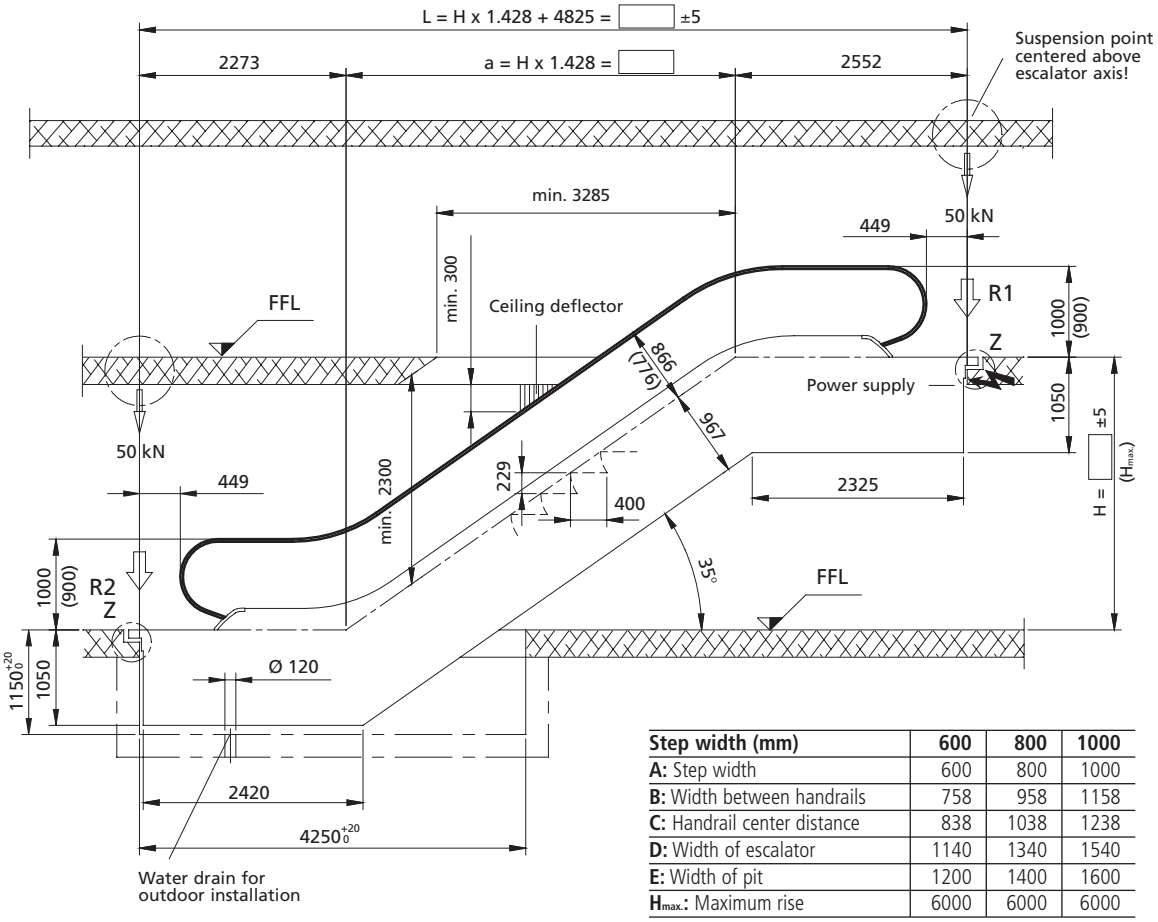

Step width (mm)	600	800	1000
A: Step width	600	800	1000
B: Width between handrails	758	958	1158
C: Handrail center distance	838	1038	1238
D: Width of escalator	1140	1340	1540
E: Width of pit	1200	1400	1600
$H_{max.}$: Maximum rise	6000	6000	6000

Transportation dimensions

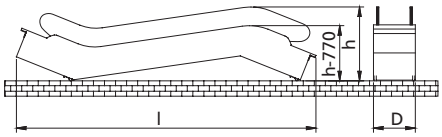

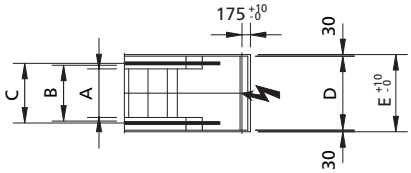

Detail Z



Step width A mm	Rise H mm	Weight kN	Support loads R1 kN	Support loads R2 kN	Transp. dimensions Balustrade height 1000 h	Transp. dimensions Balustrade height 1000 l
600	3000	49	41	35	2820	10110
	3500	52	44	38	2850	10960
	4000	55	46	40	2880	11820
	4500	58	49	43	2900	12680
	5000	60	51	45	2910	13540
	5500	63	53	48	2930	14400
	6000	66	56	50	2940	15270
800	3000	52	47	41	2820	10110
	3500	55	50	44	2850	10960
	4000	58	53	47	2880	11820
	4500	61	56	50	2900	12680
	5000	64	59	53	2910	13540
	5500	67	62	56	2930	14400
	6000	70	65	59	2940	15270
1000	3000	55	53	47	2820	10110
	3500	58	57	51	2850	10960
	4000	62	60	54	2880	11820
	4500	65	63	58	2900	12680
	5000	68	67	61	2910	13540
	5500	71	70	64	2930	14400
	6000	83	79	71	2940	15270

WIF 90134E-07/2007

Schindler